## FLEXGreat Wall of China Bowlshop Tour Recklinghausen




Oil Pattern Distance	48	Reverse Brush Drop	43	Oil Per Board	50 ul
Forward Oil Total	16.1 mL	Reverse Oil Total	9.2 mL	Volume Oil Total	25.3 mL
Tank Configuration	N/A	Tank A Conditioner	FIRE	Tank B Conditioner	ICE

2 10L 10R 1 18 3 A 21 7.6 10.1 2.5 1050 3 11L 11R 3 18 3 A 57 10.1 17.7 7.6 2850 4 12L 12R 3 18 3 A 51 17.7 25.3 7.6 2550 5 13L 13R 3 22 3 A 45 25.3 34.6 9.3 2250 6 2L 2R 0 22 3 A 0 34.6 42.0 7.4 0		START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
3 11L 11R 3 18 3 A 57 10.1 17.7 7.6 2850 4 12L 12R 3 18 3 A 51 17.7 25.3 7.6 2550 5 13L 13R 3 22 3 A 45 25.3 34.6 9.3 2250 6 2L 2R 0 22 3 A 0 34.6 42.0 7.4 0	1	2L	2R	4	18	3	Α	148	0.0	7.6	7.6	7400
4 12L 12R 3 18 3 A 51 17.7 25.3 7.6 2550 5 13L 13R 3 22 3 A 45 25.3 34.6 9.3 2250 6 2L 2R 0 22 3 A 0 34.6 42.0 7.4 0	2	10L	10R	1	18	3	Α	21	7.6	10.1	2.5	1050
5 13L 13R 3 22 3 A 45 25.3 34.6 9.3 2250 6 2L 2R 0 22 3 A 0 34.6 42.0 7.4 0	3	11L	11R	3	18	3	Α	57	10.1	17.7	7.6	2850
6 2L 2R 0 22 3 A 0 34.6 42.0 7.4 0	4	12L	12R	3	18	3	Α	51	17.7	25.3	7.6	2550
	5	13L	13R	3	22	3	Α	45	25.3	34.6	9.3	2250
7 2L 2R 0 26 2 A 0 42.0 48.0 6.0 0	6	2L	2R	0	22	3	Α	0	34.6	42.0	7.4	0
	7	2L	2R	0	26	2	Α	0	42.0	48.0	6.0	0

2 2L 2R 0 26 2 B 0 39.0 35.0 -4.0 3 13L 13R 2 22 3 B 30 35.0 28.8 -6.2 150 4 12L 12R 2 22 3 B 34 28.8 22.6 -6.2 170 5 11L 11R 3 22 3 B 57 22.6 13.3 -9.3 285 6 10L 10R 2 18 4 B 42 13.3 8.2 -5.1 210 7 10L 10R 1 14 4 B 21 8.2 6.3 -1.9 105		START	STOP	LOADS	SPEED	BUFFER	TANK	CROSSED	START	END	FEET	T.OIL
3 13L 13R 2 22 3 B 30 35.0 28.8 -6.2 150 4 12L 12R 2 22 3 B 34 28.8 22.6 -6.2 170 5 11L 11R 3 22 3 B 57 22.6 13.3 -9.3 285 6 10L 10R 2 18 4 B 42 13.3 8.2 -5.1 210 7 10L 10R 1 14 4 B 21 8.2 6.3 -1.9 105	1	2L	2R	0	30	1	В	0	48.0	39.0	-9.0	0
4     12L     12R     2     22     3     B     34     28.8     22.6     -6.2     170       5     11L     11R     3     22     3     B     57     22.6     13.3     -9.3     285       6     10L     10R     2     18     4     B     42     13.3     8.2     -5.1     210       7     10L     10R     1     14     4     B     21     8.2     6.3     -1.9     105	2	2L	2R	0	26	2	В	0	39.0	35.0	-4.0	0
5     11L     11R     3     22     3     B     57     22.6     13.3     -9.3     285       6     10L     10R     2     18     4     B     42     13.3     8.2     -5.1     210       7     10L     10R     1     14     4     B     21     8.2     6.3     -1.9     105	3	13L	13R	2	22	3	В	30	35.0	28.8	-6.2	1500
6 10L 10R 2 18 4 B 42 13.3 8.2 -5.1 210 7 10L 10R 1 14 4 B 21 8.2 6.3 -1.9 105	4	12L	12R	2	22	3	В	34	28.8	22.6	-6.2	1700
7 10L 10R 1 14 4 B 21 8.2 6.3 -1.9 105	5	11L	11R	3	22	3	В	57	22.6	13.3	-9.3	2850
•	6	10L	10R	2	18	4	В	42	13.3	8.2	-5.1	2100
8 2L 2R 0 14 4 B 0 6.3 0.0 -6.3	7	10L	10R	1	14	4	В	21	8.2	6.3	-1.9	1050
	8	2L	2R	0	14	4	В	0	6.3	0.0	-6.3	0

Cleaner Ratio Main Mix NA Forward
Cleaner Ratio Back End Mix NA Reverse
Cleaner Ratio Back End Distance NA Combined
Buffer RPM: 4 = 720 | 3 = 500 | 2 = 200 | 1 = 50
 Designed for FLEX | GREAT WALL OF CHINA - 5448 | Slot #4

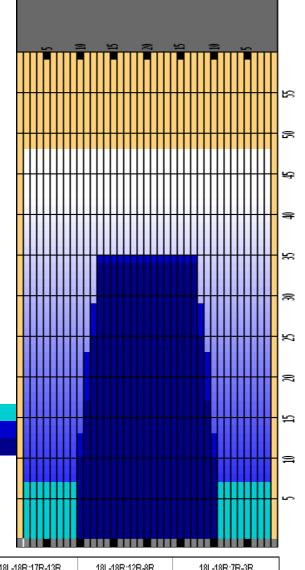

Item	3L-7L:18L-18R	8L-12L:18L-18R	13L-17L:18L-18R	18L-18R:17R-13R	18L-18R:12R-8R	18L-18R:7R-3R
Description	Outside Track: Middle	Middle Track: Middle	Inside Track: Middle	MIddle: Inside Track	Middle:Middle Track	Middle:Outside Track
Track Zone Ratio	6	2.45	1	1	2.45	6
1						

